


# Suzuki King Quad 750 EFI Controller

100% Satisfaction Guaranteed

2015 N US Highway 1, Rockingham, NC 28379  
www.ehsracing.com 910-997-2345

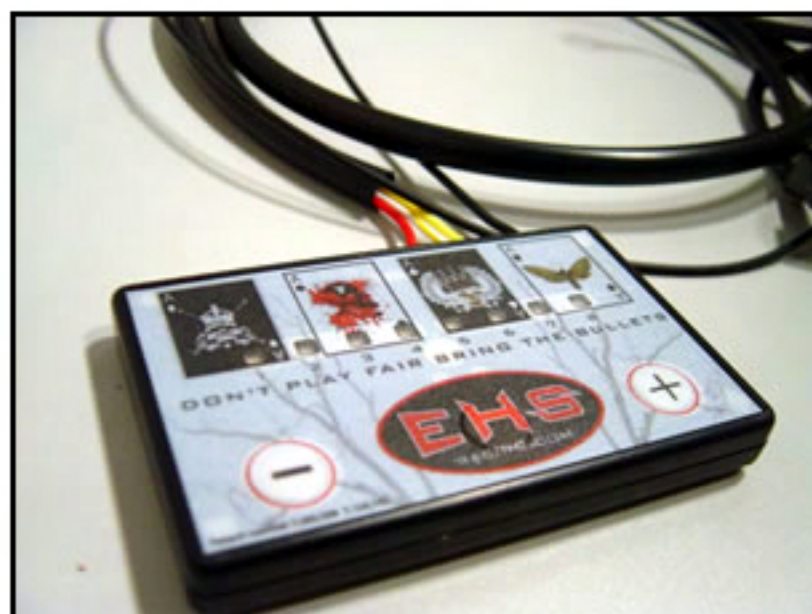

## 100% Satisfaction Guarantee

Policy applies only to products manufactured directly by or directly for EHS Racing. The time period for this policy is 30 days after delivery of items, if for any reason you the customer are unhappy with a product it can be returned to EHS Racing no questions asked. If the product was sold directly by EHS Racing we will provide money back, store credit, whatever the customer prefers. If item was purchased through a dealer or distributor we can only offer a trade allowance towards another item equal to the same value. If cash back credit is needed it must be returned to the original place of purchase. We do not cover or refund return shipping expenses and original shipping expenses, these will be forfeited by customer. After 30 days an EHS Racing product can still be returned for store credit only up until 60 days from time of delivery. After 60 days no returns will be accepted unless there is a manufacturer defect, but the decisions solely lies with EHS Racing whether an item is defective or not.

## Agreement:

EHS Racing manufactures after market parts and accessories that can be used for racing. These parts are intended for use by professionals that have proper experience in operating the equipment that those products were designed for. These products are to be installed by qualified technicians whether it be yourself or dealer, by installing any products manufactured by EHS Racing or directly for EHS Racing you assume all liability for any damages direct or consequential resulting from the installation. EHS Racing's liability extends to product replacement only.

## Parts Included:

Quantity	Description	Part Number
1	King Quad 750 EFI Controller	1012
3	Zip Ties	
1	Double Stick Pad	
1	Installation Instructions 1 page	
1	Tuning Instructions 2 pages	

## Installation Instructions

First we would like to thank you for purchasing a quality EHS Racing product. We take pride in everything we design if for any reason you're unhappy please call our shop and let us know. We stand behind our 100% Satisfaction Guarantee.

1. Make sure the ATV is in a safe stable working environment.
2. Remove the seat, and disconnect the battery.
3. Remove the left hand side plastic access panel. (Fig 1)
4. Route the EFI Tuner connectors through the battery compartment plastics towards the engine area. (Fig 2 Red Arrow) May require different routing if your using BULLET BILLET.
5. Unplug the stock gray fuel injector connector. Plug the EHS Tuner gray connector onto the injector and plug the stock injector connector to the black EHS Tuner connector. (Fig 3)

6. Attach the EHS Tuner ground wire (black) to negative terminal of battery. EHS recommends to place tuner in the battery compartment. (Fig 2 Green Arrow) Or securely mounted with the BULLET BILLET.

7. Start the ATV. The green LED should now be scrolling for about 3-5 seconds and then go to 1-3 steady green LED's or a single slow flashing green LED. If the number 1 green and number 8 red LED continue flashing after startup, an injector wiring error is indicated. Re-check the wires from the EHS Tuner and make sure they are connected to the proper wire of your ATV's stock harness. MAKE SURE you have the correct connectors selected in the stock harness. DO NOT PROCEED UNLESS ABOVE CONDITIONS ARE MET.

8. Install access panels, and anything else you may have removed.

**NOTE:** Re check your wire routing and EHS Tuner location and make certain that in no way the wires can come into contact with any moving parts or high heat source and that the EHS Tuner is mounted in a way as to not cause a handling problem with the machine.

## Settings:

Stock Lid & Aftermarket exhaust.  
G-3 Y-4 R-4.5 GB-3 YB-3 RB-5

Aftermarket Lid/Snorkels & Aftermarket Exhaust  
G-3 Y-4.5 R-5 GB-3 YB-3 RB-5

2015 and newer machines changed mapping

Stock Lid & Aftermarket exhaust.  
G-2 Y-2 R-1.5 GB-3 YB-3 RB-5

More AIR & Aftermarket exhaust.  
G-2.5 Y-2.5 R-2.5 GB-3 YB-3 RB-5

Fig. 1



Fig. 2

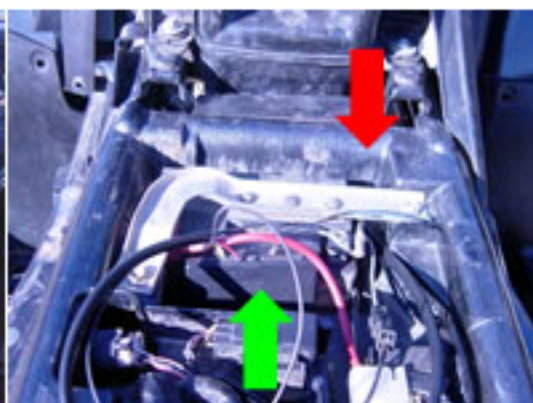


Fig.3

